

# Fuji USER MANUAL

## — BABY ANGLE DRILLS — MODELS : FCD-6EX-3, -4




FCD-6EX-3



FCD-6EX-4

■ OPTION

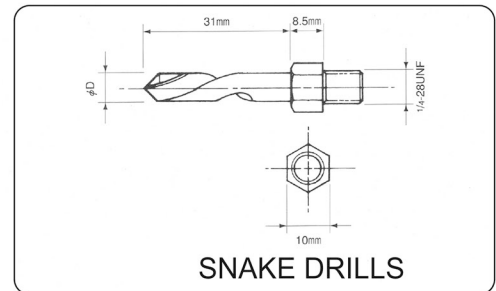

AC No.	Size	
	D	mm
SN-2	2	
SN-3	3	
SN-4	4	
SN-5	5	
SN-6	6	

### SPECIFICATIONS

Model	Drilling Capacity (Guidance)	Stall Torque			Max. Output	Free Speed	Spindle Type	Side To Center		Overall Length		Mass		Max. Air Consumption		Air Inlet Thread	Air Hose Size	
	mm	N·m	kgf·m	ft·lb	kW	min <sup>-1</sup>	in	mm	in	mm	in	kg	lb	Nm <sup>2</sup> /min	Nft <sup>2</sup> /min	in	mm	in
FCD-6EX-3	6.35	2.9	0.3	2.2	0.27	3,500	1/4-28UNF	8.5	11/32	246	9 11/16	0.69	1.5	0.76	26.8	PT1/4	6.3	1/4
FCD-6EX-4	6.35	2.9	0.3	2.2	0.27	3,500	1/4-28UNF	8.5	11/32	246	9 11/16	0.69	1.5	0.76	26.8	PT1/4	6.3	1/4

The performance figures are at 0.63MPa (6.3bar).

⚠ Refer to "The Instructions and Warning for Safety Use" enclosed in each tool box.

Fuji Industrial Technique Co.,Ltd.

2-1-14, Kamiji, Higashinari-ku, Osaka, 537-0003 Japan

Tel : 81-6-6972-2335

Fax : 81-6-6972-2380

