


Fuji USER MANUAL

STRAIGHT GRINDERS

MODELS : FG-5H-1, -1M, -2, -2M, -3



FG-5H-1, -2, -3

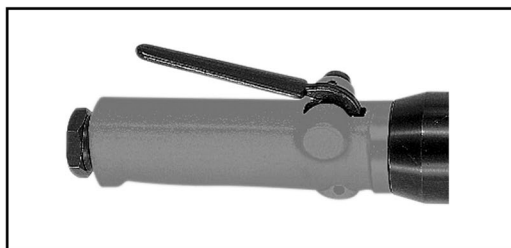

FG-5H-1M, -2M

SPECIFICATIONS

Model	Max. Dia (Grinding Wheel)		Rotational Frequency	Spindle Thread Size	Overall Length		Mass		Max. Air Consumption		Air Inlet Thread Size	Air Hose Size	
	mm	in			mm	in	kg	lb	m ³ /min	ft ³ /min		mm	in
FG-5H-1	125×19×12.7	5×3/4×1/2	7,600	W1/2-12	405	15 60/64	2.7	6.0	1.0	35.3	Rc 3/8	12.7	1/2
FG-5H-1M	125×19×12.7	5×3/4×1/2	7,600	W1/2-12	506	19 29/32	2.5	5.5	1.0	35.3	Rc or NPT 3/8	12.7	1/2
FG-5H-2	125×19×15.8	5×3/4×5/8	7,600	5/8-11UNC	410	15 1/7	2.8	6.1	1.0	35.3	Rc 3/8	12.7	1/2
FG-5H-2M	125×19×15.8	5×3/4×5/8	7,600	5/8-11UNC	511	20 1/8	2.5	5.5	1.0	35.3	Rc or NPT 3/8	12.7	1/2
FG-5H-3	150×25×15.8	6× 1 ×5/8	6,300	5/8-11UNC	421	16 19/32	2.8	6.1	0.9	31.8	Rc 3/8	12.7	1/2

The performance figures are at 0.63MPa (6.3bar).

⚠ Refer to "The Instructions and Warning for Safety Use" enclosed in each tool box.

Fuji Industrial Technique Co.,Ltd.

2-1-14, Kamiji, Higashinari-ku, Osaka, 537-0003 Japan

Tel : 81-6-6972-2335

Fax : 81-6-6972-2380

