


Fuji USER MANUAL

TAPPERS

MODEL : FT-6P-1

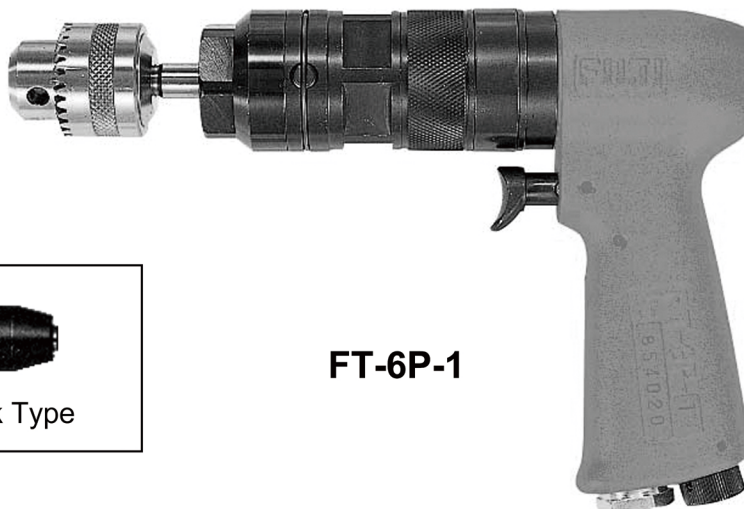

Tapping Chuck Type

FT-6P-1

SPECIFICATIONS

MODEL	Type	Chuck Capacity mm	Spindle Type J.T.No.1	Stall Torque N·m	Max. Output kW	Rotational Frequency		Max. Air Consumption m ³ /min	Distance from Center to Side mm	Overall Length mm	Mass kg	Air Inlet Thread Size Rc or NPT 1/4	Air Hose Size mm
						Right min ⁻¹	Left min ⁻¹						
FT-6P-1	Drill Chuck (DCK-8J)	8	J.T.No.1	17.4	0.3	1,000	1,000	0.5	23	236	1.8	Rc or NPT 1/4	9.5
FT-6P-1	Tapping Chuck (TCK-6)	8	J.T.No.1	17.4	0.3	1,000	1,000	0.5	23	267	1.8	Rc 1/4	9.5

The performance figures are at 0.63MPa (6.3bar).

⚠ Refer to "The Instructions and Warning for Safety Use" enclosed in each tool box.

Fuji Industrial Technique Co.,Ltd.


2-1-14, Kamiji, Higashinari-ku, Osaka, 537-0003 Japan

Tel : 81-6-6972-2335

Fax : 81-6-6972-2380

MODEL : FT-6P-1

EXPLODED VIEW

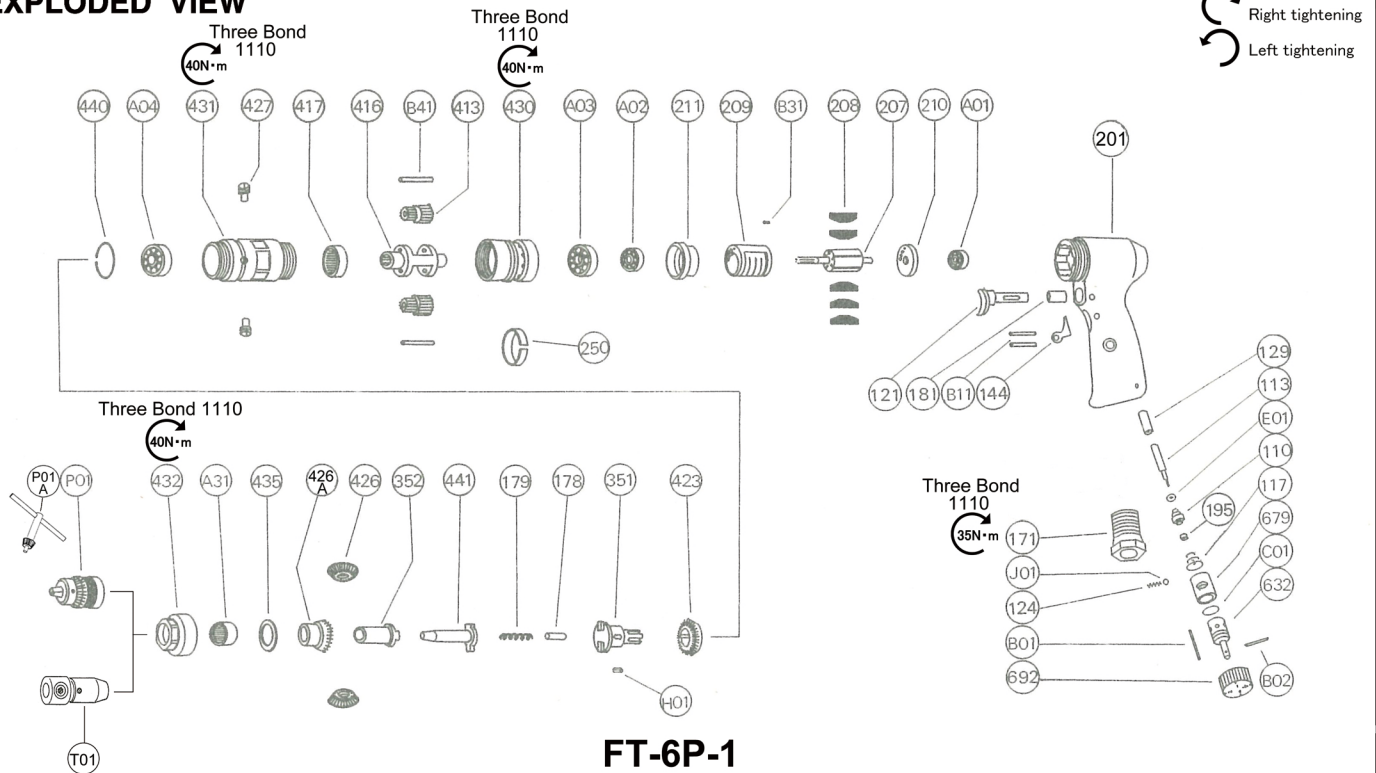

PARTS LIST

Index No.	Parts No.	Parts Name	Qty
FT-6P-1			
—	T-001006-00	Housing Ass'y <Rc>	
—	T-001006-01	Housing Ass'y <NPT>	
117	W-017117-01	Throttle Valve Spring	1
121	W-017121-A	Throttle Valve Lever	1
124	G-044124-00	Knock Spring	1
144	W-017144-00	Throttle Valve Lever (B)	1
171	W-017171-02	Inlet Joint <Rc>	1
	W-017171-01	Inlet Joint <NPT>	1
632	W-017632-01	Regulator	1
692	W-017692-01	Regulator Knob	1
B01	SP-322	Spring Pin	1
B02	SP-318	Spring Pin	1
B11	NR-422	Needle Roller	2
C01	O-P9	"O"Ring	1
J01	B-4	Ball	1
—	T-001006-50	Housing Semi Ass'y	
129	W-017129-00	Throttle Valve Rod Bushing	1
201	T-001201-02	Housing	1
679	W-017679-01	Regulator Bushing	1
—	W-017008-00	Throttle Valve Rod Ass'y	
110	W-017110-01	Throttle Valve	1
113	W-017113-02	Throttle Valve Rod	1
195	W-017195-00	Sub Throttle Valve	1
E01	PW-3	Washer	1
178	T-001178-00	Plunger	1
179	T-001179-00	Plunger Spring	1
207	T-001207-A	Rotor	1
208	G-013208-00	Rotor Blade	4
209	G-011209-01	Cylinder	1
(B31)	SP-26	Spring Pin	1
210	D-002210-02	Cylinder Upper Plate	1

Index No.	Parts No.	Parts Name	Qty
211	D-001211-00	Cylinder Lower Plate	1
250	M-002250-00	Exhaust Cover	1
351	T-001351-00	Clutch	1
352	T-001352-00	Clutch (B)	1
413	T-001413-00	No.1 Planet Gear	2
416	T-001416-00	No.1 Planet Gear Frame	1
417	T-001417-00	No.1 Internal Gear	1
423	T-001423-00	Bevel Pinion	1
426	T-001426-00	No.1 Bevel Gear	2
426A	T-001426-A	No.2 Bevel Gear	1
427	T-001427-00	Bevel Gear Spindle	2
430	T-001430-00	No.1 Gear Case	1
431	T-001431-00	No.2 Gear Case	1
432	T-001432-00	Gear Case Cover	1
435	T-001435-00	Thrust Washer	1
440	T-001440-00	Ring	1
441	T-001441-01	Spindle (B)	1
A01	BB-626	Ball Bearing	1
A02	BB-608	Ball Bearing	1
A03	BB-EE4	Ball Bearing	1
A04	BB-6003	Ball Bearing	1
A31	NB-SC138	Needle Bearing	1
B41	NR-431	Needle Roller	2
H01	K-336.5	Key	1
Drill Chuck type			
P01	DCK-8J	Drill Chuck	1
(P01A)	DCK-10H	Drill Chuck Handle	1
Tapping Chuck type			
T01	TCK-6	Tapping Chuck	1

- ☐ The related parts are shown in a thick frame.
- ☐ #209 and #P01 are supplied together with parts shown in ().
- ☐ Specify parts number and quantity when ordering.

■ Standard Accessory (for Tapping chuck type)

AC No.	Description	Qty
F-706	6mm Hex. Pin Wrench	1